



LFPAK56

Symbol


Parameter	Value	Unit
V_{DS}	40	V
$R_{DS(ON)-Max}$	1.2	m Ω
I_D	276	A

Key Features

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant & Halogen-Free
- 100% UIS and Rg Tested
- Moisture Sensitivity Level MSL 1

Applications

- DC-to-DC converters
- Switch Mode Power Supply
- Brushless DC motor control

Ordering Information

Ordering part Number	Marking code	Package	Form
VPLMDF7114	7114	LFPAK56	Tape & Reel

Absolute Maximum Ratings (T_j = 25°C, unless otherwise specified)

Parameter	Symbol	N-Channel	Unit
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Maximum Junction Temperature	T_J	175	°C
Storage Temperature Range	T_{STG}	-55 to 175	°C
Diode Continuous Forward Current	I_S	75	A
Diode Pulse Current	I_{SP}	400 ⁽¹⁾	A
Pulse Drain Current Tested	I_{DM}	800 ⁽¹⁾	A
Continuous Drain Current	I_D	$T_C=25^\circ C$	276
		$T_C=100^\circ C$	195
Maximum Power Dissipation	P_D	$T_C=25^\circ C$	125
		$T_C=100^\circ C$	62.5
Continuous Drain Current	I_D	$T_A=25^\circ C$	45
		$T_A=70^\circ C$	38
Maximum Power Dissipation	P_D	$T_A=25^\circ C$	3.3
		$T_A=70^\circ C$	2.3
Avalanche Current, Single pulse	$I_{AS}^{(2)}$	L=0.1mH	48
		L=0.5mH	25
Avalanche Energy, Single pulse	$E_{AS}^{(2)}$	L=0.1mH	115
		L=0.5mH	156

Thermal Characteristics

Parameter	Symbol	Rating	Unit
Thermal Resistance-Junction to Case	$R_{\theta JC}$	1.2	°C/W
Thermal Resistance-Junction to Ambient	$R_{\theta JA}^{(3)}$	45	°C/W

- (1) Max. current is limited by bonding.
- (2) UIS tested and pulse width are limited by maximum junction temperature 150°C
- (3) Surface Mounted on 1in² FR-4 board with 1oz.

Electrical Characteristics ($T_j = 25^\circ\text{C}$, unless otherwise specified)

Static Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	40	-	-	V	$V_{GS}=0V, I_{DS}=250\mu A$
Zero Gate Voltage Drain Current	I_{DSS}	-	-	1	μA	$V_{DS}=32V, V_{GS}=0V$
Gate Threshold Voltage	$V_{GS(th)}$	1	1.7	2.3	V	$V_{DS}=V_{GS}, I_{DS}=250\mu A$
Gate Leakage Current	I_{GSS}	-	-	± 100	nA	$V_{GS}=\pm 20V, V_{DS}=0V$
Drain-Source On-state Resistance	$R_{DS(ON)}^{(4)}$	-	1.0	1.2	m Ω	$V_{GS}=10V, I_{DS}=20A$
		-	1.6	2		$V_{GS}=4.5V, I_{DS}=10A$
Forward Transconductance	g_{fs}	-	48	-	S	$V_{DS}=5V, I_{DS}=10A$

Dynamic Characteristics⁽⁵⁾

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Gate Resistance	R_G	-	1.3	-	Ω	$V_{GS}=0V, V_{DS}=0V,$ Freq.=1MHz
Input Capacitance	C_{iss}	-	4930	-	pF	$V_{GS}=0V, V_{DS}=20V,$ Freq.=1MHz
Output Capacitance	C_{oss}	-	2005	-		
Reverse Transfer Capacitance	C_{rss}	-	68	-		
Turn-on Delay Time	$t_{d(ON)}$	-	10.5	-	nS	$V_{GS}=10V, V_{DS}=20V,$ $I_D=20A, R_{GEN}=3\Omega$
Turn-on Rise Time	t_r	-	25.4	-		
Turn-off Delay Time	$t_{d(OFF)}$	-	65.5	-		
Turn-off Fall Time	t_f	-	54	-		

Gate Charge Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Total Gate Charge	Q_g	-	70	-	nC	$V_{GS}=10V, V_{DS}=20V,$ $I_D=20A$
Gate-Source Charge	Q_{gs}	-	17	-		
Gate-Drain Charge	Q_{gd}	-	10.5	-		

Source Drain Diode Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Diode Forward Voltage	$V_{SD}^{(4)}$	-	0.75	1.1	V	$I_{SD}=10A, V_{GS}=0V$
Reverse Recovery Time	t_{rr}	-	48.8	-	nS	$I_F=20A, V_R=20V$ & $di_F/dt=100A/\mu s$
Reverse Recovery Charge	Q_{rr}	-	35.8	-	nC	

- ⁽⁴⁾ Pulse test (pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$).
- ⁽⁵⁾ Guaranteed by design, not subject to production testing.

Electrical Characteristics Diagrams

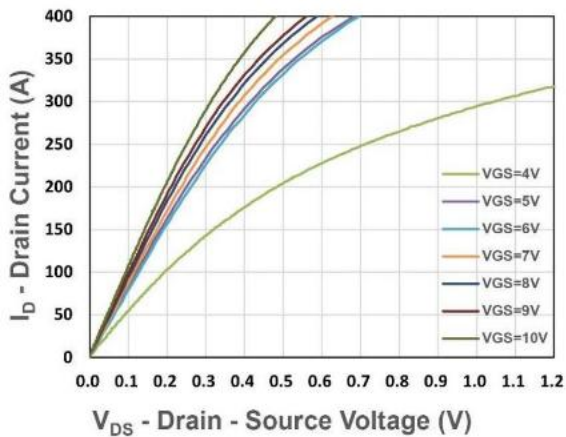


Figure 1. Output Characteristics

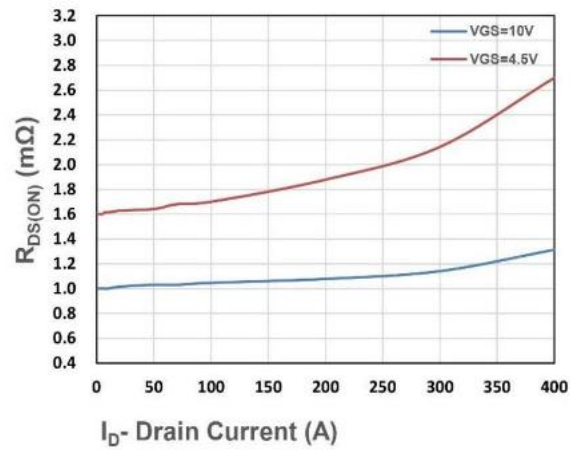


Figure 2. On-Resistance vs. ID

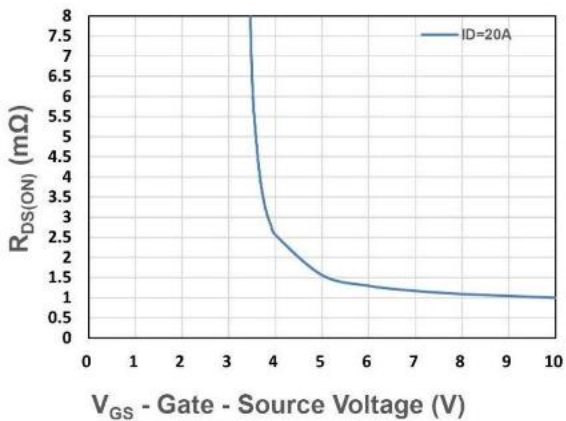


Figure 3. On-Resistance vs. VGS

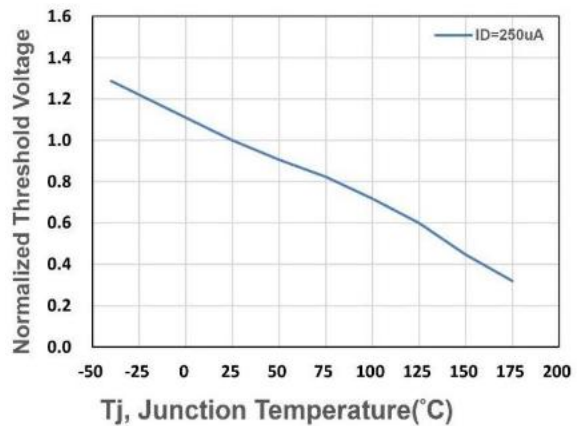


Figure 4. Gate Threshold Voltage

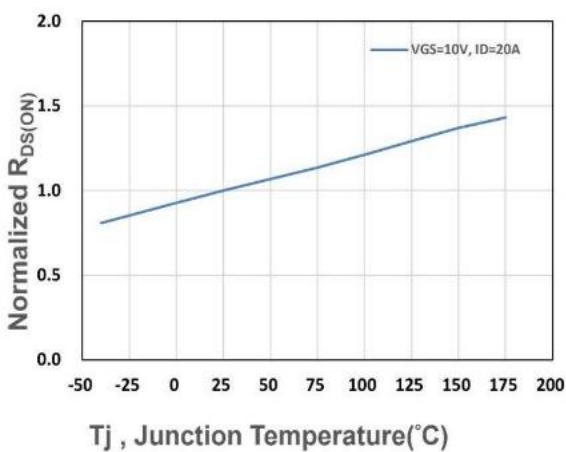


Figure 5. Drain-Source On Resistance



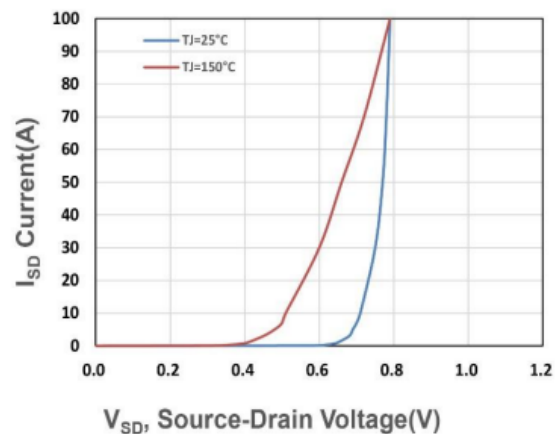


Figure 6. Source-Drain Diode Forward

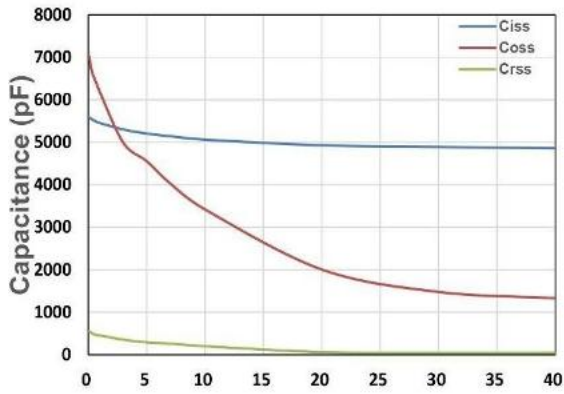


V_{DS} - Drain - Source Voltage (V)

Figure 7. Capacitance

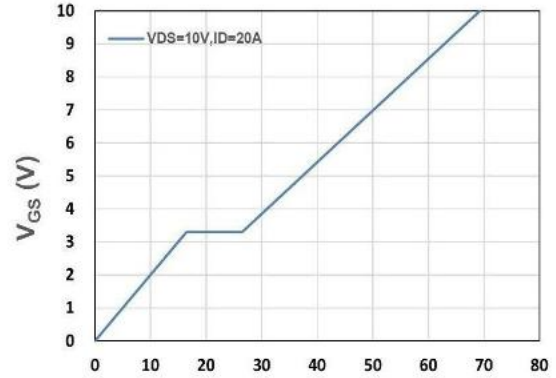


Q_g , Total Gate Charge (nC)

Figure 8. Gate Charge Characteristics

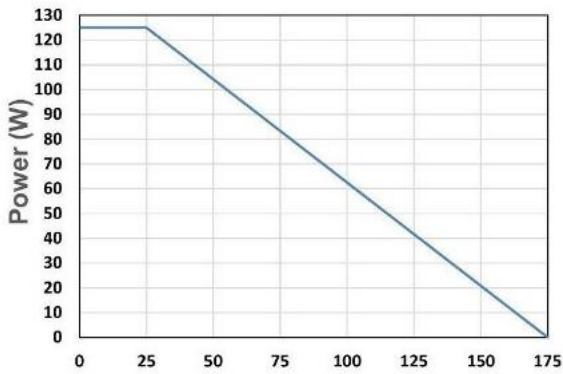


T_c - Case Temperature ($^{\circ}C$)

Figure 9. Power Dissipation

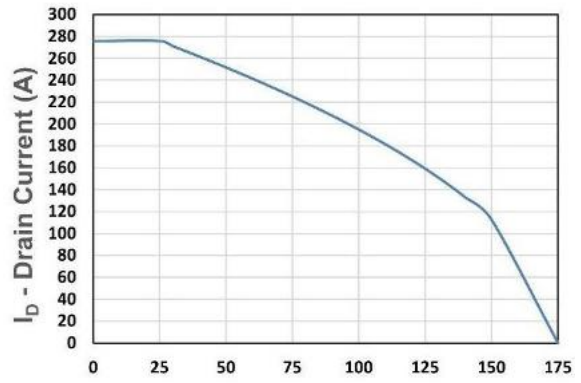


T_c - Case Temperature ($^{\circ}C$)

Figure 10. Drain Current

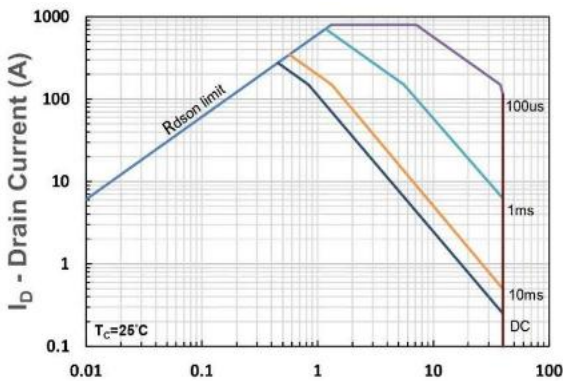

V_{DS} - Drain-Source Voltage (V)

Figure 11. Safe Operating Area

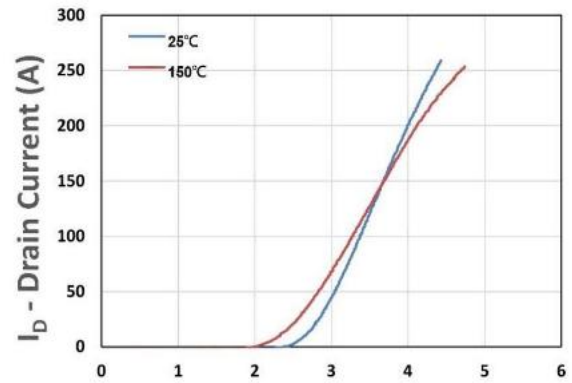

V_{GS} - Gate - Source Voltage (V)

Figure 12. Transfer Characteristics


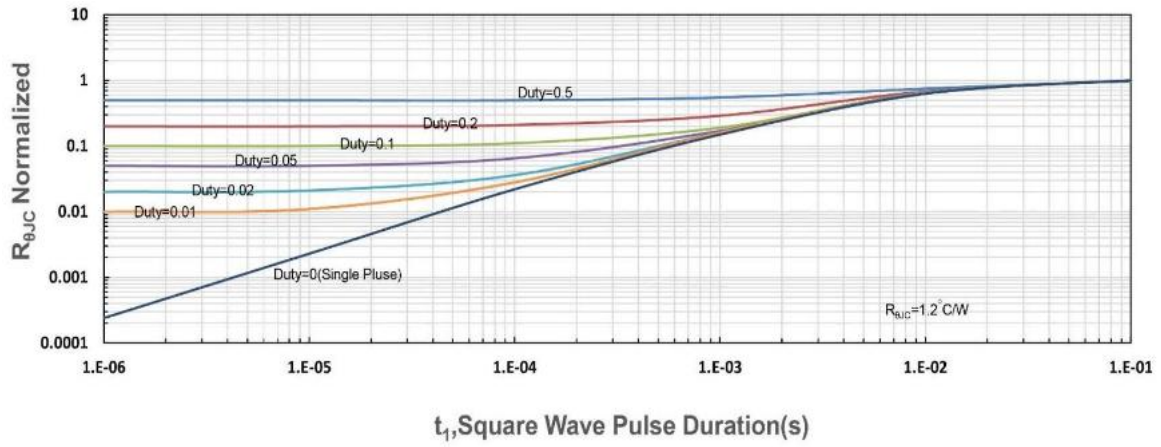



Figure 13. $R_{\theta JC}$ Transient Thermal Impedance

Package Information (LFPAK56)

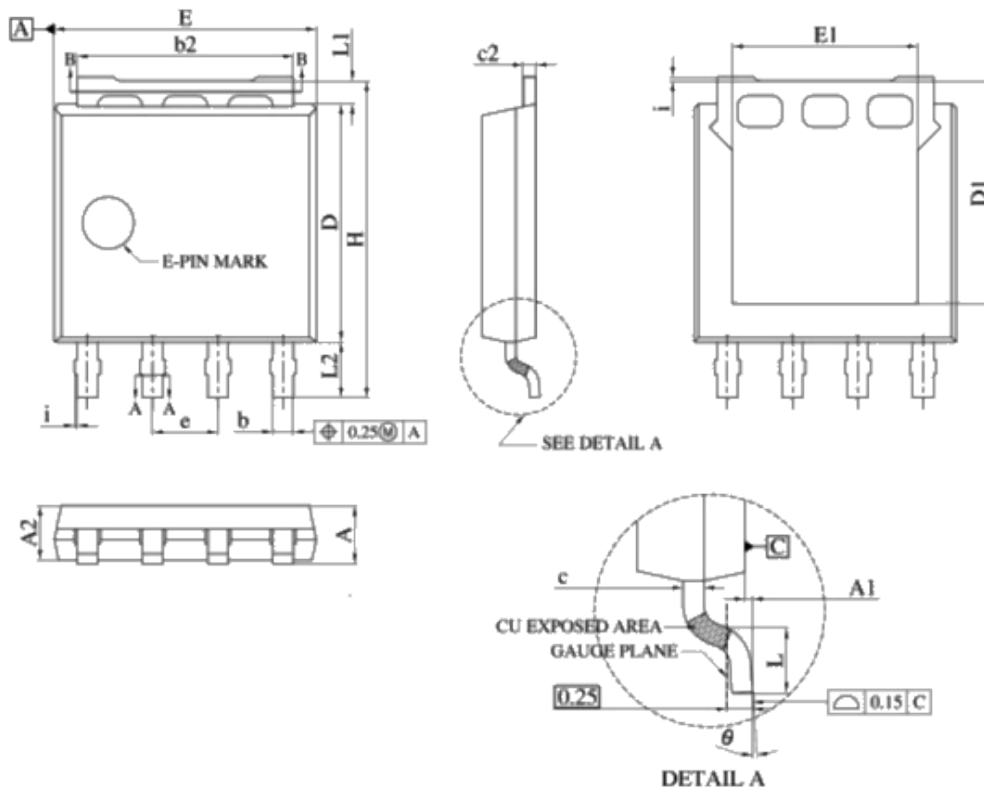

Outline dimensions in mm

Unit:mm	Min	Typ	Max
A	1.000	-	1.300
A1	0.000	0.075	0.150
A2	0.980	1.050	1.120
b	0.350	0.420	0.500
b2	4.020	4.230	4.410
c	0.190	0.220	0.250
c2	0.240	0.270	0.300
D	4.450	-	4.700
D1	-	-	4.450
E	4.950	-	5.300
E1	3.500	-	3.700
e	1.27 BSC		
H	5.950	-	6.250
i	-	-	0.250
L	0.400	-	0.850
L1	0.270	-	0.570
L2	0.800	-	1.300
θ	0°	-	8°

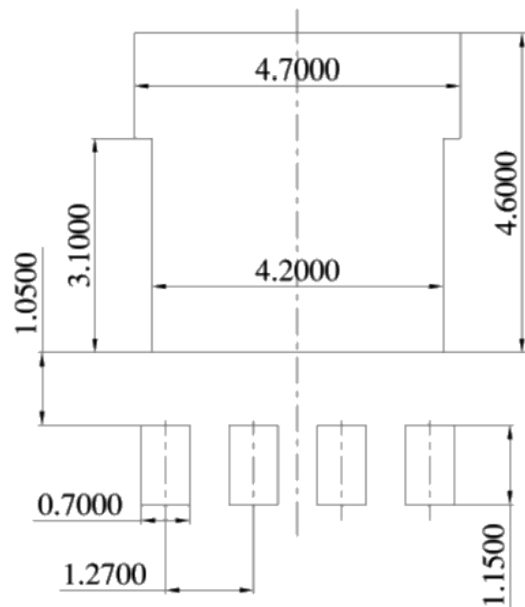

Suggested Pad Layout (Unit:mm)

Disclaimer

The information provided in this datasheet is believed to be accurate and reliable. Errors or omissions are expected. indiaVP Semiconductor Pvt. Ltd. reserves the right to make changes to the product specifications without prior notice. Users should verify the suitability of the product for their specific applications. Please visit our website for the latest datasheet.

Contact Information

indiaVP Semiconductor Pvt. Ltd.

Email: sales@ivpsemi.com

Website: www.ivpsemi.com