



TO-247

Symbol


Key Features

- High Speed Switching & Low Power Loss
- $V_{CE(sat)} = 1.8V$ @ $I_C = 40A$
- Maximum junction temperature 175°C

Applications

- Inverters
- Welding converters
- High range switching frequency converters

Ordering Information

Ordering part Number	Marking code	Package	Form
VPMIPP4003	4003	TO-247	Tube

Maximum Rating ($T_J = 25^\circ C$, unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector-emitter voltage	V_{CE}	650	V
DC collector current, limited by T_{vjmax}	I_C	$T_C=25^\circ C$ 80	A
		$T_C=100^\circ C$ 40	
Pulsed collector current, t_p limited by T_{vjmax}	I_{Cpuls}	120	A
Diode forward current limited by T_{vjmax}	I_F	$T_C=25^\circ C$ 40	A
		$T_C=100^\circ C$ 20	
Diode pulsed current, t_p limited by T_{vjmax}	I_{Fpuls}	120	A
Gate-emitter voltage	V_{GE}	± 20	V
Power dissipation	P_D	$T_C=25^\circ C$ 230	W
		$T_C=100^\circ C$ 115	
Operating Junction temperature range	T_{vj}	-40~175	$^\circ C$
Storage temperature range	T_{stg}	-55~150	$^\circ C$

Thermal Characteristic

Parameter	Symbol	Rating	Unit
Thermal resistance junction-to-ambient	$R_{\theta JA}$	40	$^\circ C/W$
Thermal resistance junction-to-case for IGBT	$R_{\theta JC}$	0.65	
Thermal resistance junction-to-case for Diode	$R_{\theta JC}$	1.75	

Electrical Characteristic ($T_{vj} = 25^{\circ}\text{C}$ unless otherwise specified)

Static Characteristic

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-emitter breakdown voltage	BV_{CES}	650	-	-	V	$I_C = 2\text{mA}$, $V_{GE} = 0\text{V}$
Collector-emitter saturation voltage	$V_{CE(sat)}$	-	1.8	2.3	V	$I_C = 40\text{A}$, $V_{GE} = 15\text{V}$, $T_{vj} = 25^{\circ}\text{C}$
		-	2.3	-		$I_C = 40\text{A}$, $V_{GE} = 15\text{V}$, $T_{vj} = 175^{\circ}\text{C}$
Diode forward voltage	V_F	-	1.5	1.95	V	$V_{GE} = 0\text{V}$, $I_F = 20\text{A}$, $T_{vj} = 25^{\circ}\text{C}$
		-	1.5	-		$V_{GE} = 0\text{V}$, $I_F = 20\text{A}$, $T_{vj} = 175^{\circ}\text{C}$
Gate-emitter threshold voltage	$V_{GE(th)}$	3.5	5.0	6.5	V	$V_{CE} = V_{GE}$, $I_C = 40\text{mA}$
Zero gate voltage collector current	I_{CES}	-	-	40	μA	$V_{CE} = 650\text{V}$, $V_{GE} = 0\text{V}$, $T_{vj} = 25^{\circ}\text{C}$
Gate-emitter leakage current	I_{GES}	-	-	± 100	nA	$V_{GE} = 20\text{V}$, $V_{CE} = 0\text{V}$

Dynamic Characteristic

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Total gate charge	Q_g	-	60	-	nC	$V_{CE} = 520\text{V}$, $I_C = 40\text{A}$, $V_{GE} = 15\text{V}$
Gate-emitter charge	Q_{ge}	-	13	-		
Gate-collector charge	Q_{gc}	-	25	-		
Input capacitance	C_{ies}	-	1565	-	pF	$V_{CE} = 25\text{V}$, $V_{GE} = 0\text{V}$, $f = 1\text{MHz}$
Reverse transfer capacitance	C_{res}	-	37	-		
Output capacitance	C_{oes}	-	120	-		

Switching Characteristic

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Turn-on delay time	$t_{d(on)}$	-	6	-	ns	$V_{GE} = 15V, V_{CC} = 400V, I_C = 40A, R_G = 10\Omega$, Inductive Load, $T_{vj} = 25^{\circ}C$
Rise time	t_r	-	36	-		
Turn-off delay time	$t_{d(off)}$	-	55	-		
Fall time	t_f	-	64	-		
Turn-on switching energy	E_{on}	-	0.5	-	mJ	
Turn-off switching energy	E_{off}	-	0.4	-		
Total switching energy	E_{ts}	-	0.9	-		
Turn-on delay time	$t_{d(on)}$	-	7	-	ns	$V_{GE} = 15V, V_{CC} = 400V, I_C = 40A, R_G = 10\Omega$, Inductive Load, $T_{vj} = 175^{\circ}C$
Rise time	t_r	-	41	-		
Turn-off delay time	$t_{d(off)}$	-	60	-		
Fall time	t_f	-	102	-		
Turn-on switching energy	E_{on}	-	1.04	-	mJ	
Turn-off switching energy	E_{off}	-	0.57	-		
Total switching energy	E_{ts}	-	1.61	-		

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse recovery time	t_{rr}	-	60	-	ns	$I_F = 20A$, $di_F/dt = 820A/\mu s$, $T_{vj} = 25^\circ C$
Reverse recovery current	I_{rr}	-	18	-	A	
Reverse recovery charge	Q_{rr}	-	696	-	nC	
Reverse recovery time	t_{rr}	-	72	-	ns	$I_F = 20A$, $di_F/dt = 820A/\mu s$, $T_{vj} = 175^\circ C$
Reverse recovery current	I_{rr}	-	22	-	A	
Reverse recovery charge	Q_{rr}	-	864	-	nC	

Electrical Characteristic Diagrams

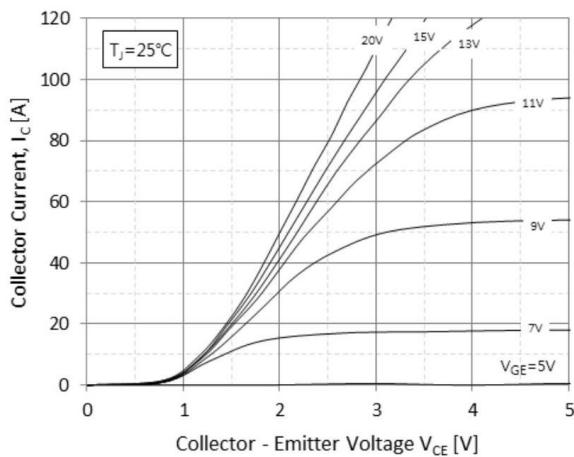


Figure 1. Typical Output Characteristics ($T_J=25^\circ\text{C}$)

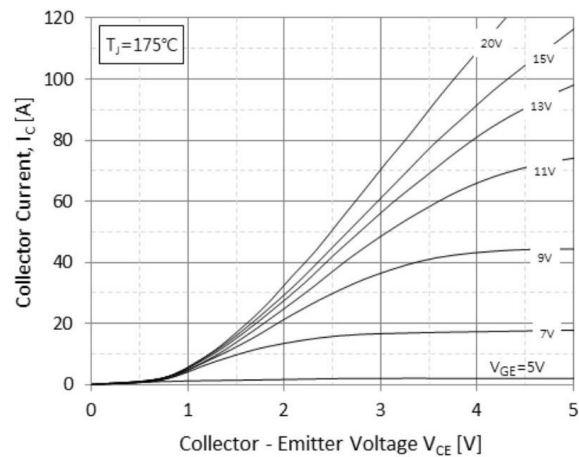


Figure 2. Typical Output Characteristics ($T_J=175^\circ\text{C}$)

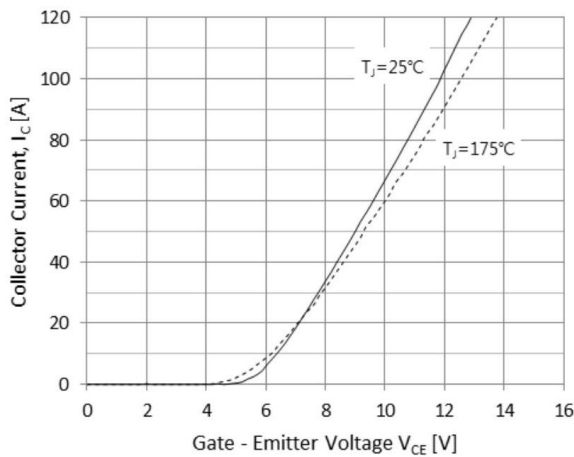


Figure 3. Typical Transfer Characteristics

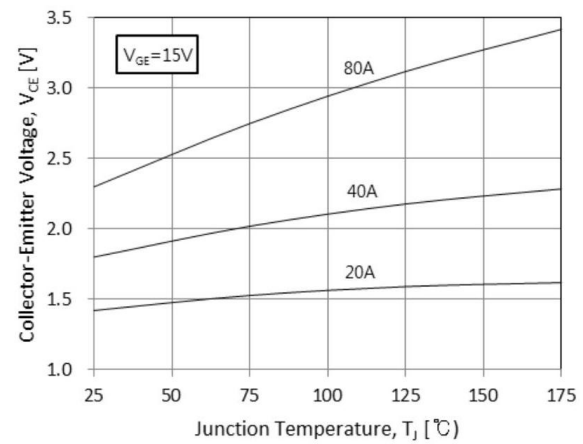


Figure 4. Typical Collector-Emitter Saturation Voltage-Junction Temperature

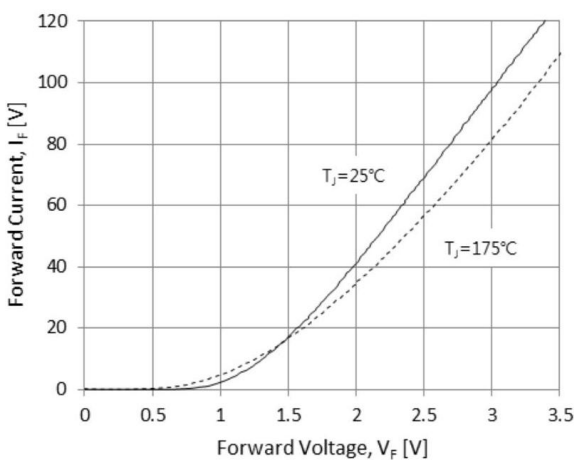


Figure 5. Diode Forward Characteristics

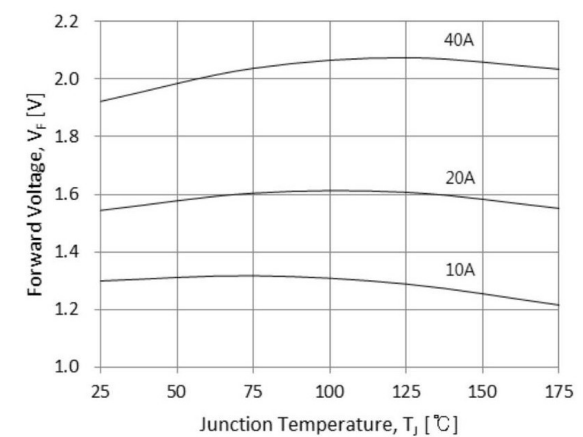


Figure 6. Diode Forward-Junction Temperature

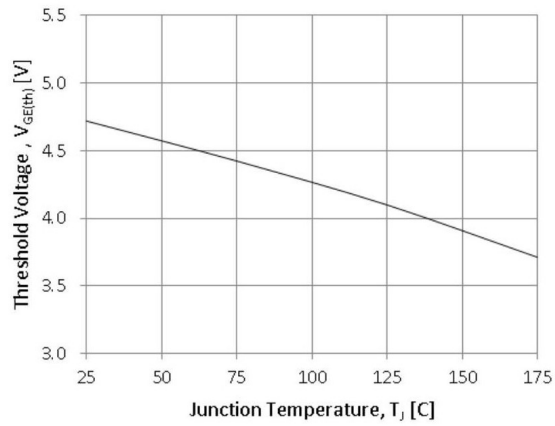


Figure 7. Threshold Voltage-Junction Temperature

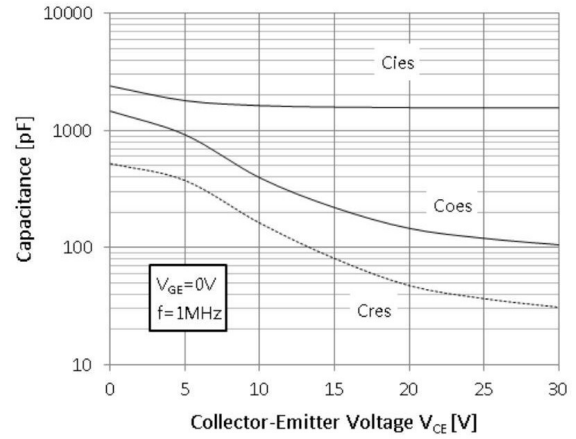


Figure 8. Typical Capacitance

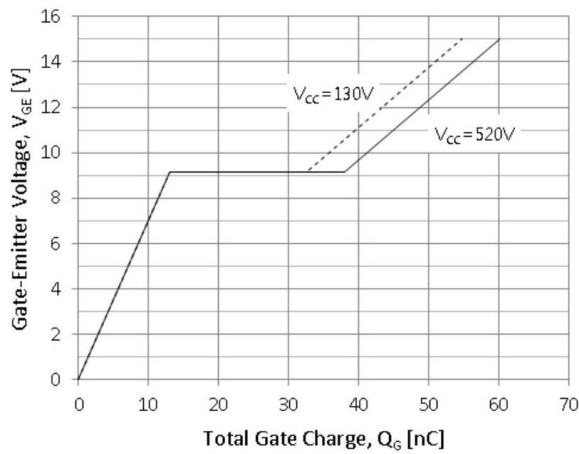


Figure 9. Typical Gate Charge

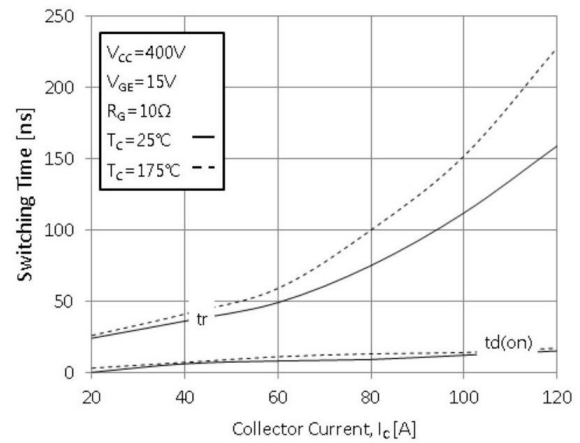


Figure 10. Typical Turn on-Collector Current

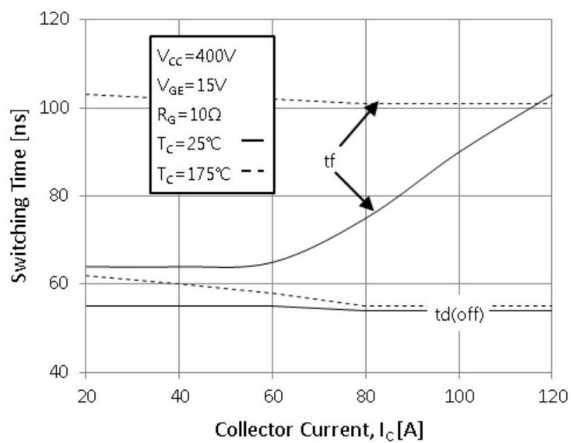


Figure 11. Typical Turn off-Collector Current

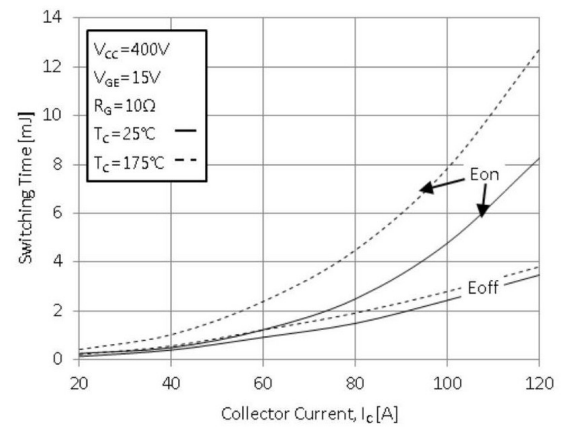


Figure 12. Switching Loss-Collector Current

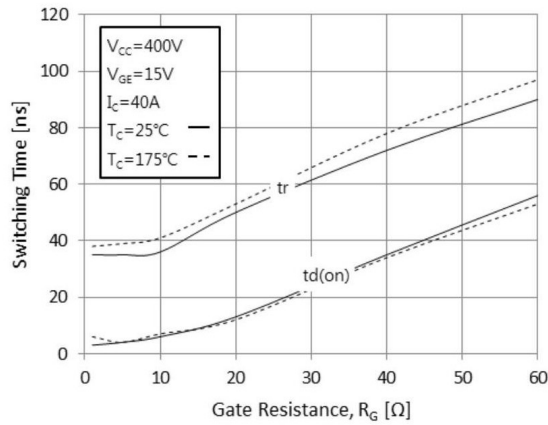


Figure 13. Turn on Characteristics-Gate Resistance

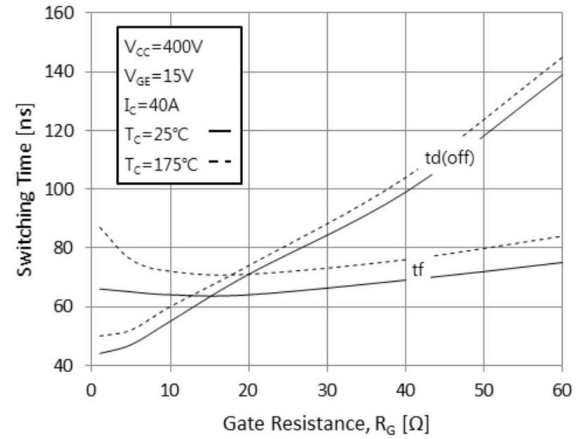


Figure 14. Turn off Characteristics-Gate Resistance

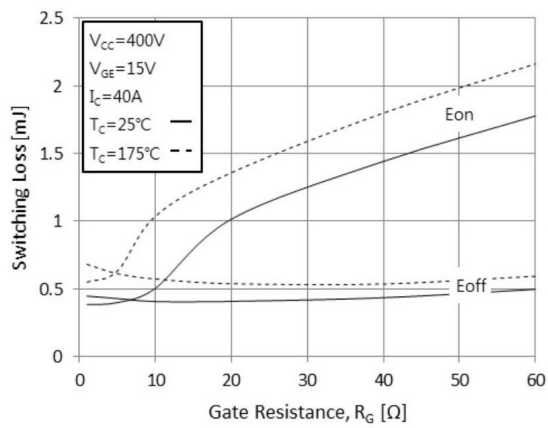


Figure 15. Switching Loss-Gate Resistance

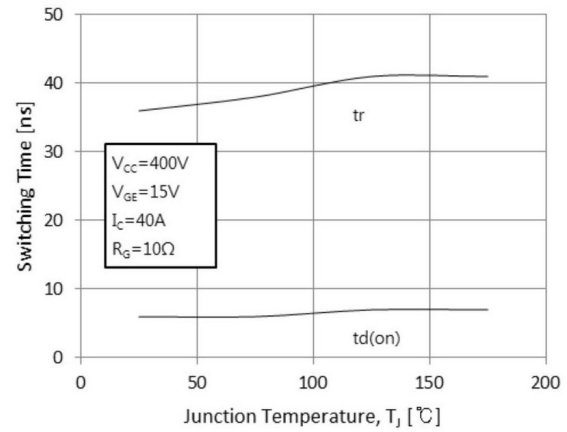


Figure 16. Turn on Characteristics-Junction Temperature

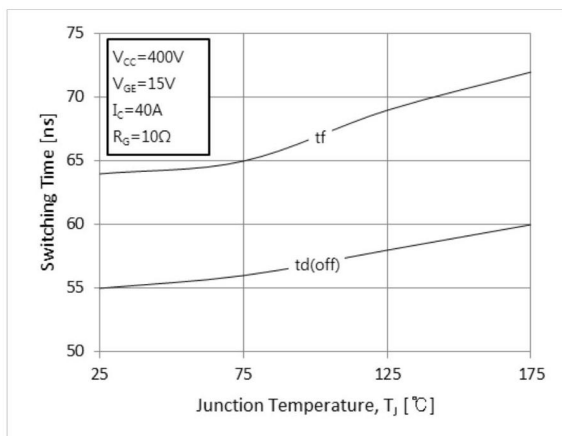


Figure 17. Turn off Characteristics-Junction Temperature

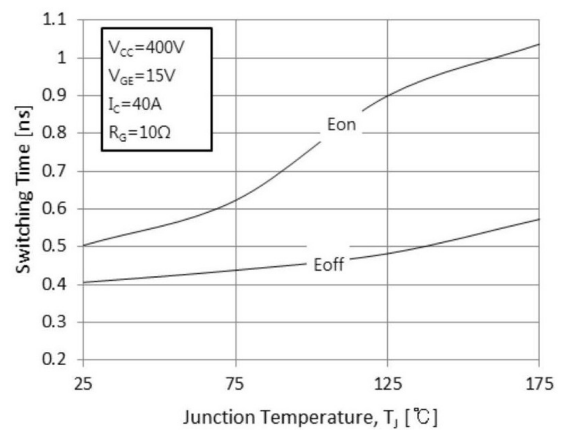


Figure 18. Switching Loss-Junction Temperature

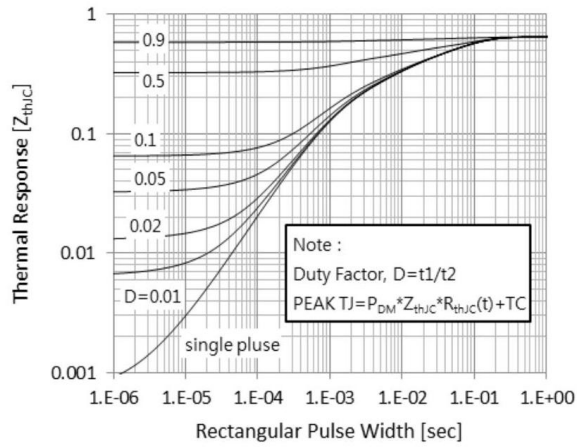


Figure 19. IGBT Transient Thermal Impedance


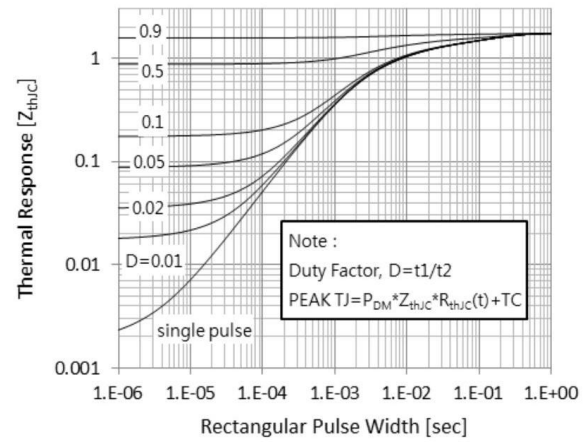


Figure 20. FRD Transient Thermal Impedance

Package Information (TO-247)

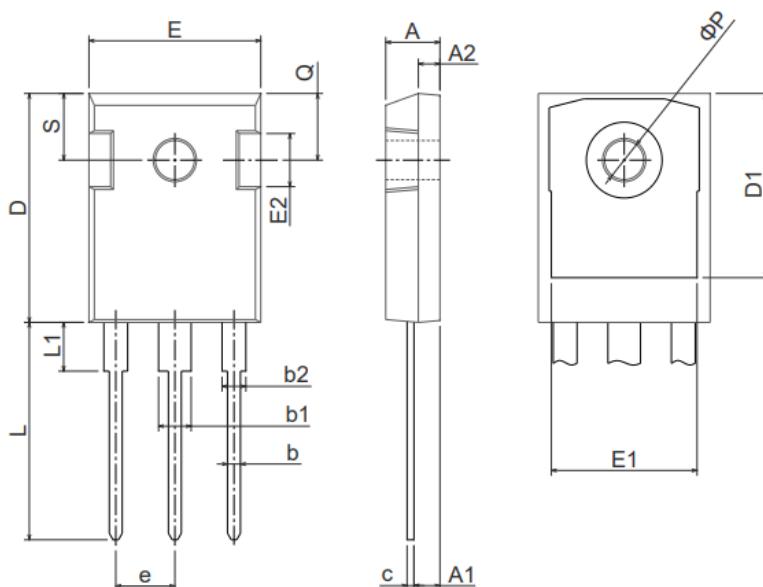

Outline dimensions in mm

Symbol	Min	Nom	Max
A	4.70	-	5.31
A1	2.20	-	2.60
A2	1.50	-	2.49
b	0.99	-	1.40
b1	2.59	-	3.43
b2	1.65	-	2.39
c	0.38	-	0.89
D	20.30	-	21.46
D1	13.08	-	-
E	15.45	-	16.26
E1	13.06	-	14.02
E2	4.32	-	5.49
e	5.45 BSC		
L	19.81	-	20.57
L1	-	-	4.50
ØP	3.50	-	3.70
Q	5.38	-	6.20
S	6.15 BSC		

Disclaimer

The information provided in this datasheet is believed to be accurate and reliable. Errors or omissions are expected. iVP Semiconductor Pvt. Ltd. reserves the right to make changes to the product specifications without prior notice. Users should verify the suitability of the product for their specific applications. Please visit our website for the latest datasheet.

Contact Information

iVP Semiconductor Pvt. Ltd.

Email: sales@ivpsemi.com

Website: www.ivpsemi.com